


Configuring communication between VLANs

In the last chapter you made the configurations to accommodate each user on its VLAN, but communication between them was not established. Your task as a Cisco network engineer is to enable communication between computers that belong to the same VLAN (Marketing 1 - Marketing 2, Sales 1 - Sales 2).

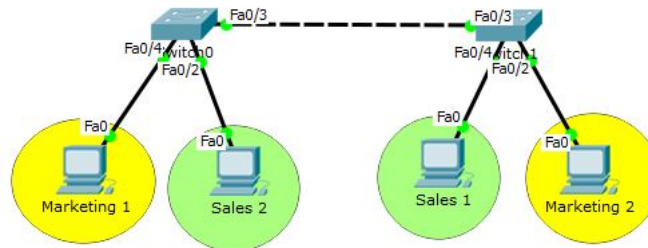

You need to configure the network as follows:

- On sales' room (left-hand side) you need to create VLAN 3 to accommodate the user Marketing 1
- You must keep the same names, VLAN 2 Sales and VLAN 3 Marketing
- On marketing's room (right-hand side) you need to create VLAN 2 to accommodate the user Sales 1

Try to ping the computers inside the same VLAN, was the communication established this time?

Você precisará do Packet Tracer para esse exercício: [https://drive.google.com/open?](https://drive.google.com/open?id=0BzmYQVmw4W7nTkgxaXdmbVRRMwC)

[id=0BzmYQVmw4W7nTkgxaXdmbVRRMwC](https://drive.google.com/open?id=0BzmYQVmw4W7nTkgxaXdmbVRRMwC) (<https://drive.google.com/open?id=0BzmYQVmw4W7nTkgxaXdmbVRRMwC>)

Dicas:

- Para estabelecer comunicação entre os dispositivos da mesma VLAN, configure a porta conectando os Switches para atuar em modo Trunk